

EASY FLYER


assembly instructions

Step 1:
Unroll kite.


Step 2:
Identify struts (Diagram A).



Step 3:
Insert the Cross Strut into the Cross Strut Pockets at the leading edge of the kite (Diagram B).

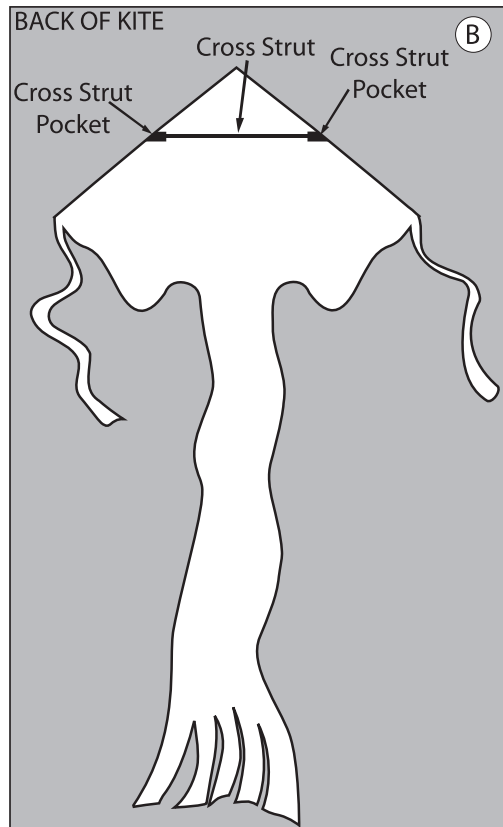

Step 4:
Attach your line to the tow point (Diagram C).

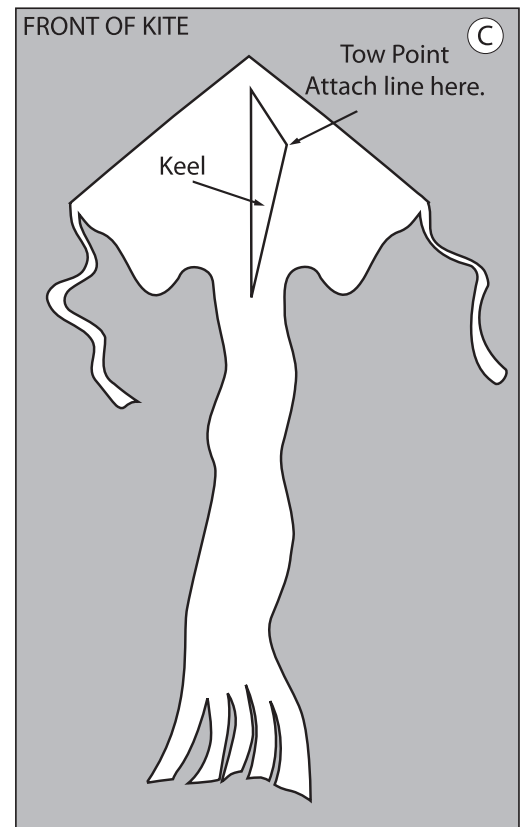

Your kite is now ready to fly!

FLIGHT INSTRUCTIONS:

- Attach flying line to Tow Loop.
- Have a friend stand about 75 ft. downwind from you and hold the kite with its Leading Edge pointed towards the sky.
- As the wind catches the kite, signal your friend to release it while you bring in the line with long steady pulls.
- Slowly let out more line as the kite flies upward.

RECOMMENDED LINE: 30 LB TEST LINE

OPTIMUM WIND CONDITIONS FOR EASY FLYERS

BEAUFORT SCALE	CALM	LIGHT AIR	LIGHT BREEZE	GENTLE BREEZE	MODERATE BREEZE	FRESH BREEZE	STRONG BREEZE																								
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
[M.P.H.]	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
WIND																															
	Easy Flyer																														

Note: Wind conditions aloft may vary considerably from those found near ground level.